



Ultimate PCB Depaneling Router

Depanelist

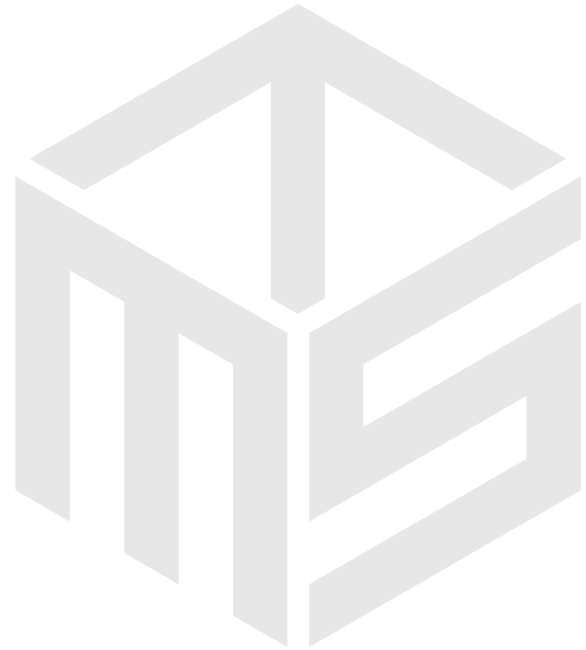


#301, Yaesung Factoring, 188 Geumjung-dong,
Gunpo-si, Gyeonggi-do, Korea
(Zip Code : 15841)
Tel. +82-31-454-6486 Fax. +82-31-454-6487
www.mstechcorp.co.kr



15841, 경기도 군포시 공단로 223, 301
(금정동, 예성팩토링)
Tel. (031)454-6486 Fax.(031)454-6487
www.mstechcorp.co.kr

Depanelist

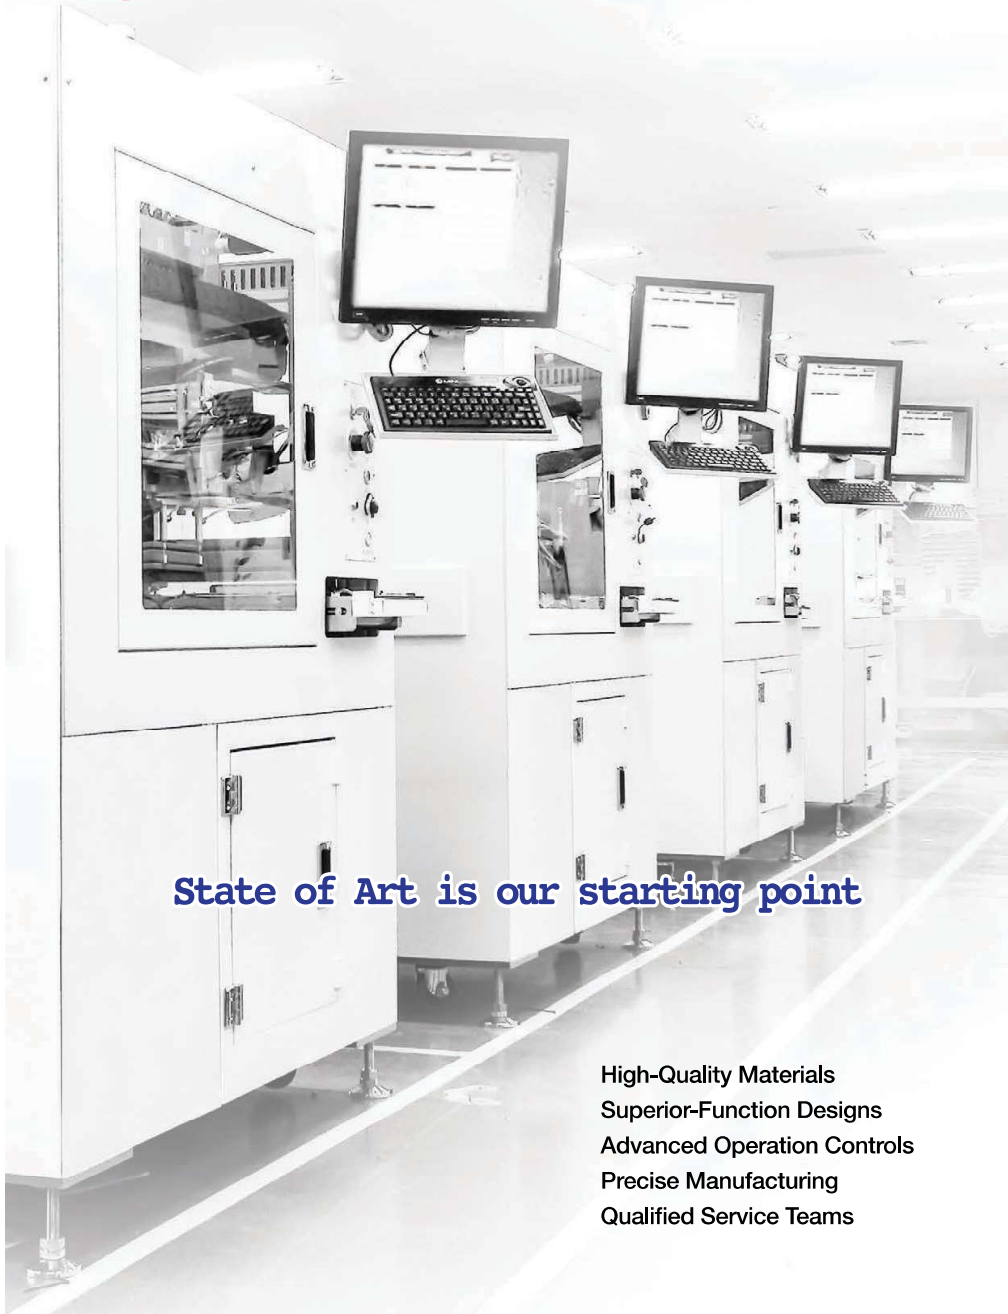

State of Art is our starting point

- High-Quality Materials
- Superior-Function Designs
- Advanced Operation Controls
- Precise Manufacturing
- Qualified Service Teams

THE NEXT GENERATION!!

Excellent features of **Depanelist** guarantee the safe performances. Highly accurate and smooth cutting processes will not damage the surfaces, assembled parts, and components.

At the same time, Depanelist will satisfy all customers' expectations and requirements without limitations.

MSTECH will provide outstanding depaneling systems to meet the various customers' needs.



Depanelist

MSTECH

Pursuit of Perfection

Depanelist the world's most technically advanced depaneling router system



DPL-D Patent

FULLY AUTOMATIC DUAL IN-LINE ROUTER

- Independently Working Dual Station & Dual Lane
- Independently Working Dual Transfer (X2)
- Mixed & Mass Productivity (Maximum Depaneling Performance)
- Automatic Pitch Adjustment for Multi-Dual Spindles (1~5 X2)
- Real-Time Monitoring of Spindle RPM (Option)
- Bit Broken & Slip Down Detection
- Quick & Easy Programming with Camera & MPG/JOG
- User friendly GUI based on IPC & Touch LCD (X2)
- Compact Footprint (1M Width)



DPL-ST NEW

FULL AUTO SINGLE IN-LINE ROUTER + AUTO TRAY

- Auto Tray Function
- Fastest Cycle Time by New Crank Type Z-Axis
- Real-Time Monitoring of Spindle RPM
- Shuttle Type In-Let Conveyor (Free Lay-Out)
- Pass/Fail PCB Separation
- Selective Use of Single or Dual Spindle
- Programless Loader & Unloader Position
- ID Verification with Fingerprint (Option)
- Interlock with AGV System (Option)




Outlooks

DPL-S

FULLY AUTOMATIC SINGLE IN-LINE ROUTER

- Fastest Cycle Time from Dual Spindle (3~5 Spindle Optional)
- Dual Transfer for Minimizing Idle Time
- Vacuum Type or Gripper Type Unloader
- Real-Time Monitoring of Spindle RPM (Option)
- Bit Broken & Slip Down Detection
- Pallet Transportation System or Pallet Shuttle (Option)
- Auto Tray Function (Option)
- Quick & Easy Programming with Camera & MPG/JOG
- CAD/CAM Data Conversion & Edge Detection (Option)



DPL-T

TWIN SHUTTLE STANDARD ROUTER

- Fastest Cycle Time from Dual Spindle (3-5 Spindle Optional)
- Mixed Production & Auto Spindle Pitch Adjustment
- Bit Broken & Slip Down Detection (Option)
- Safety Area Curtain
- Compact Footprint
- Quick & Easy Programming with Camera & MPG/JOG
- Barcode Interlock & MES Interface (Option)
- CAD/CAM Data Conversion & Edge Detection (Option)
- All Diagnostic Intellectual Dust Collector (Option)



DPL-TW(SW) SAWING

TWIN SHUTTLE SAWING SYSTEM

- Twin Table for Minimizing Idle Time & Mixed Production
- Simultaneous Top/Bottom Dust Removal
- Rotating Sawing Head (0-270°) by Servo (Option)
- Safety Area Curtain
- Compact Footprint
- Quick Model Changeover
- User friendly GUI based on IPC & Touch LCD
- Quick & Easy Programming with Camera & MPG/JOG
- Barcode Interlock & MES Interface (Option)




DPL-S

SINGLE SHUTTLE STANDARD ROUTER

- Fastest Cycle Time from Dual Spindle (3-5 Spindle Optional)
- Bit Broken & Slip Down Detection (Option)
- Compact Footprint
- Quick Model Changeover
- User friendly GUI based on IPC & Touch LCD
- Quick & Easy Programming with Camera & MPG/JOG
- Barcode Interlock & MES Interface (Option)
- CAD/CAM Data Conversion & Edge Detection (Option)



Options



Vision System+MES



Auto Vertical Rack Insert



Pallet Transp. System



Grip Unloader



500W Spindle



ATC



PCB Unloader



Universal Jig

Outstanding Features & New Technologies

Hardware Features

Mixed and Mass Production Patent

Twin-tables (single-side and dual-side) allow continuous operations without downtime, which provides the maximum productivity. Multi-tasking operations enable even mixed production for different models.



Automatic Width Adjustment for Multi-Spindles Patent

Multi-spindle (2-5) can memorize all different PCB pitches. Customers can achieve flexibilities for mixed and mass productions.



Real-Time Monitoring of Spindle RPM

Spindle RPM is monitored by sensor in real time, which can protect PCB & its components from stress or damage due to abnormal RPM change while cutting. Bit Slip Down is also detected.



Software Features


ID Verification with Fingerprint (Option)

As more enhanced security function than previous log-in system, customer can manage the machine operation & maintenance more efficiently. Fingerprints of authorized persons are registered in the system with their face picture, and they can log in the system with their fingerprints. The log-in record remains at Log File of system.



Edge Detection (Option)

As a powerful Vision System function, the both sides PCB edges beside a cutting tab are detected and compensate cutting position by tolerance of boards. The Edge Detection function can make the perfect flush cutting accuracy (0 ~ -20μm) while typical accuracy is within +/-0.1mm. Both linear and curvilinear Edge Detection are available.




Auto Programming & Dimensional Inspection (Option)

The concept of the Edge Detection function can be also used for Automatic Programming and Dimensional Inspection after depaneling. The special Vision System scans a panel and acquires all cutting positions of the panel automatically with edge tolerance offset. Also Dimensional Inspection after depaneling is optionally available.

CAD/CAM Data Conversion (Option)

The cutting data of a panel can be acquired from CAD/CAM Data Conversion function more easily and simply than typical camera-aid teaching method. This function can be used for offline programming.



Full Graphical User Interface

Easiest operation & maintenance are possible by Full Graphical User Interface and CCD camera. MPG provides quick & convenient teaching for detail functions without additional teaching pendant.

Self Diagnosis Mode / Teaching & MES interface are also available.


Barcode Interlock & MES / LMS (Line Monitoring System)

Features & Specifications are subject to change without prior notice for improvement.

Peripheral Equipment & Customization

Dust Collector NEW

- All Diagnostic Intellectual Dust Collector
- Real-Time Monitoring System (Router UI Interlock & Pop-Up Window)
- Filter Tear & Block Detection
- Dust Outlet Leak Detection (Anti-Pollution)
- Dust Box Full Detection
- Real-Time Blower Current Monitoring
- Auto Pulsing
- Router Damper Differential Pressure Detection

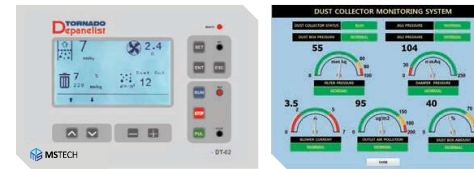

Customization

- Customized Operator-less Complex System & Process Establish
- Full Operator-less Process Development (Magazine Loader + Router + Inspection + Tray Function)
- Automatic Measurement Inspection
- MES (Mfg. Execution System) & LMS (Line Monitoring System)
- Pass/Fail PCB Automatic Separation
- Auto Vertical Rack PCB Insert
- Other Customized Systems Development Available

